



LAC4 SERIES LIGHTNING ARRESTERS:

- Protects from surges up to 5000 Amperes
- Designed to last

LAC4 LIGHTNING ARRESTERS



Lightning Arresters

- LAC-4** 200 Watt UHF connector gas tube arrester
- LAC-4H** 2 kW UHF connector gas tube arrester
- LAC-4N** 200 Watt N connector gas tube arrester
- LAC-4NH** 2 kW N connector gas tube arrester
- LC2** 200 Watt cartridge for LAC-4, LAC-4N
- LC2KW** 2 KW cartridge for LAC-4H, LAC-4NH

Lightning Protection for your Radio Equipment


The Cushcraft LAC-4 series of lightning arresters are designed to protect radio equipment from static electricity and lightning induced surges that travel on coaxial transmission lines. The LAC-4 protects your equipment from surges up to 5,000 Amperes.

The Cushcraft LAC-4 is superior to other available devices because it presents a constant impedance to your transmission line. Mechanically, the LAC-4 has been designed to last. All of the mechanical connections are positively secured. The gas discharge tube is easily changed by the user if necessary.

SPECIFICATION CHART

Model	Freq. MHz	Max Power Watts	Insertion Loss (dB)
LAC-4	50	200	<0.10
	250	200	<0.15
	500	100	<0.20
LAC-4H	50	2000	<0.10
	250	500	<0.15
	500	100	<0.20
LAC-4N*	50	200	<0.10
	250	200	<0.10
	500	200	<0.10
	1000	150	<0.10
	2000	100	<0.20
LAC-4NH*	50	2000	<0.10
	250	1000	<0.10
	500	800	<0.10
	1000	500	<0.10
	2000	250	<0.20
LAC-4NH*	3000	150	<0.25

VSWR LAC4N

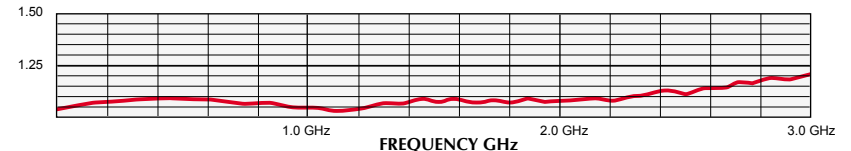

VSWR LAC4

